
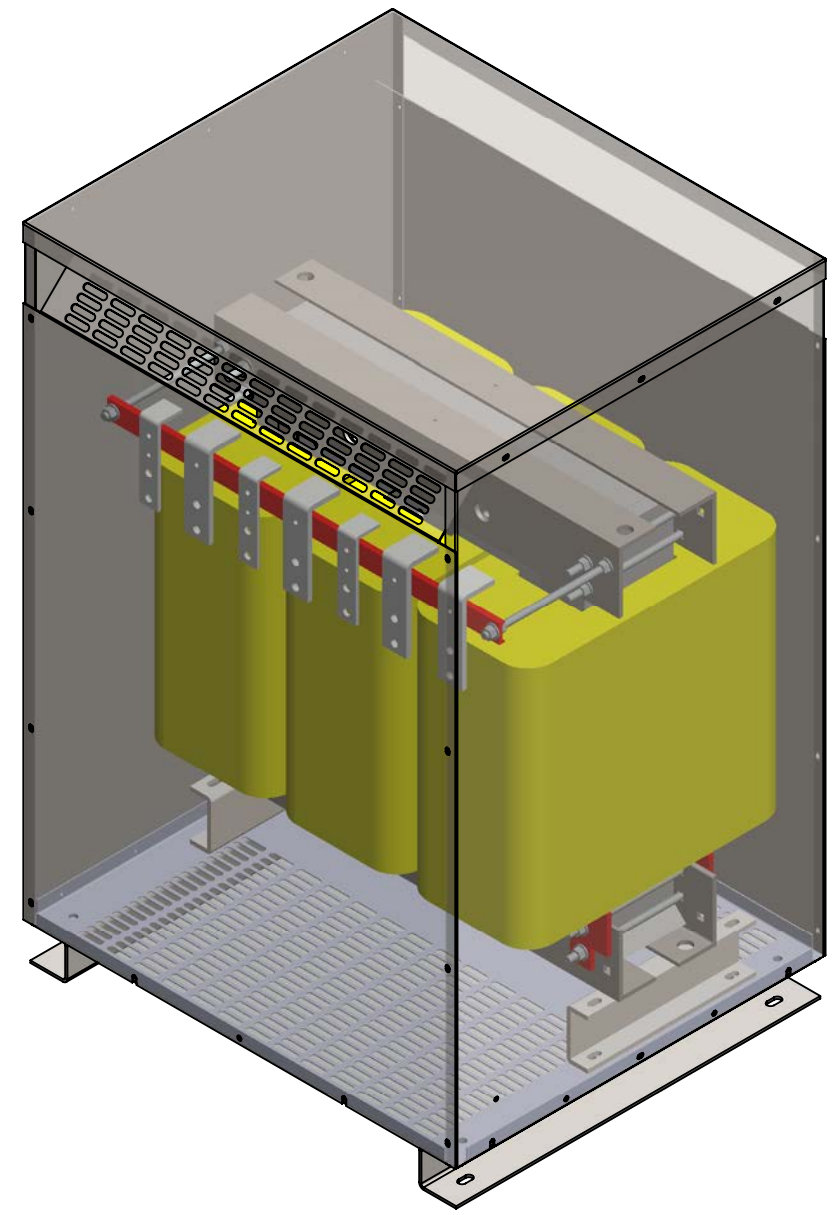
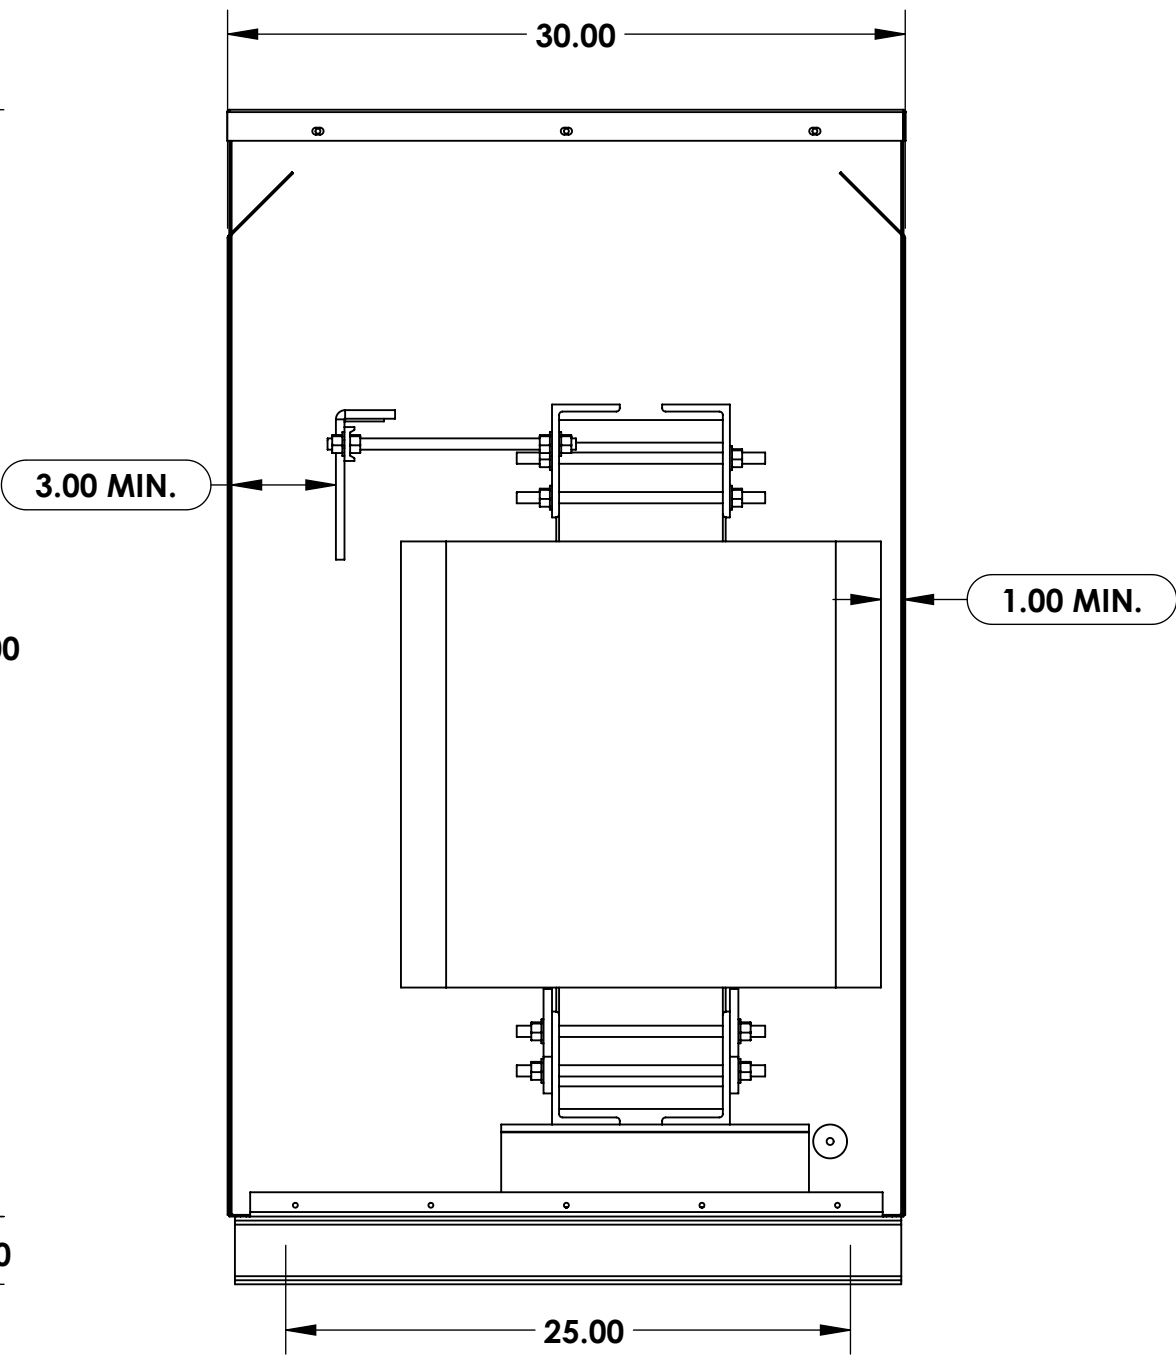


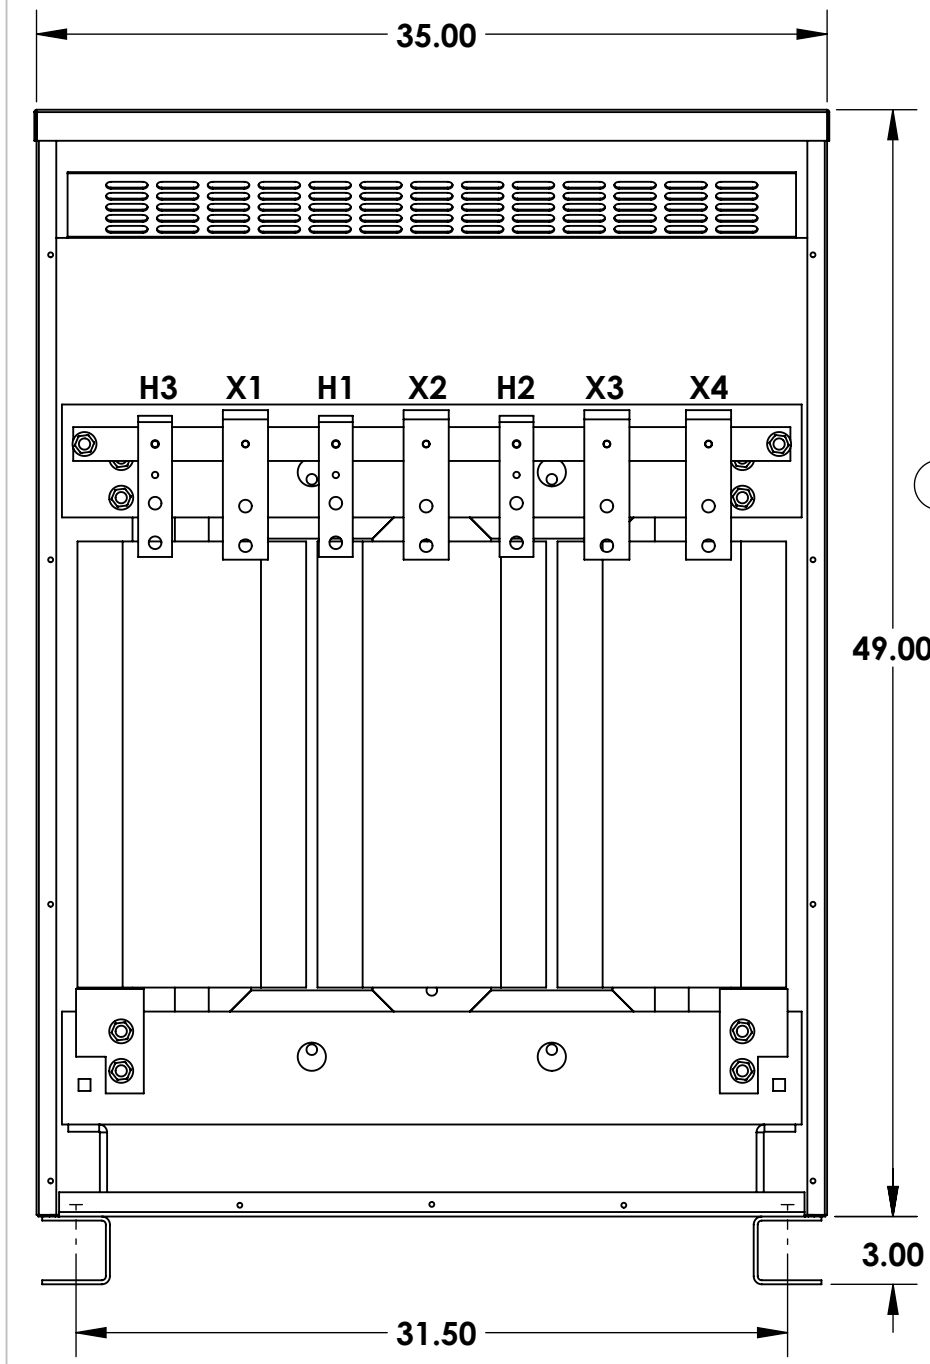

A	09/01/2020	INITIAL RELEASE
REV	DATE	DESCRIPTION

FINISH:	
DRAWN DATE	
CHECKED DATE	

TOLERANCES UNLESS OTHERWISE SPECIFIED
2-PL ± .02
3-PL ± .005
HOLES ± .030
ANGLES ± 1°
REMOVE ALL BURRS
SCALE
NTS
DRAWN BY
MO
CHK'D BY
EJ
WEIGHT:

**OVERALL ASSEMBLY
300KVA TRANSFORMER
D/D W/CT
35" ENCL.**

SHEET


1 OF 2

PART NO.

423-9317-000-CD

kVA 300 High Voltage: 480 Delta Low Voltage: 240 Delta / 120 CT

Phase 3
Hz 60
%IZ 6.3
Rise 150 °C
Ins. Class 220 °C
Weight 1910 lbs
Class AA
Wdg. Mtl. AI

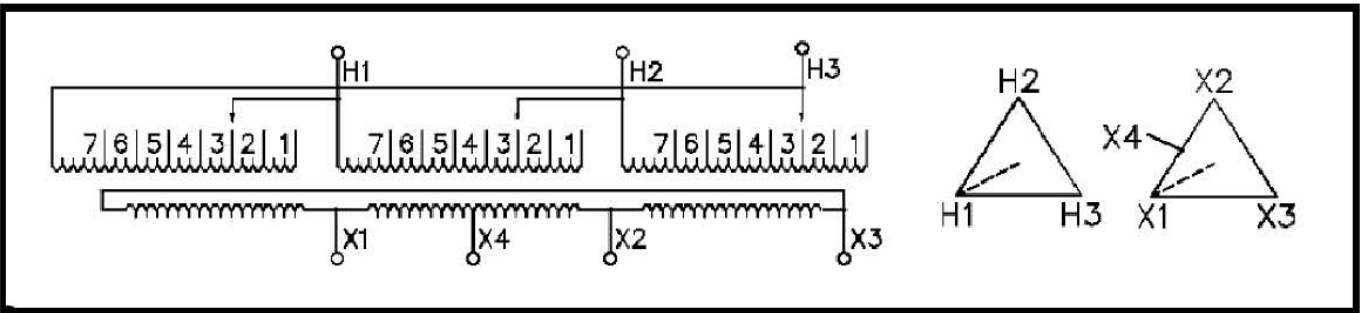

High Voltage: Lines on H1, H2, H3

Connect	1	2	3	4	5	6	7
Volts	504	492	480	468	456	444	432

Low Voltage: Lines on X1-X2-X3

Line - Line 240 V	Lines X1-X4 & X2-X4 120 V 1 Ph Only
----------------------	--



SEISMIC
QUALIFIED to IBC, CBC
SDS=2.00g, z/h=1.0, 1p=1.5
Rigid Floor Mounted
OSHDP OSP-0109-10

Meets DOE-2016
Efficiency

423 Series

Outdoor Type 3R

Datecode: R1701 Job#: 0SRG1 SN: 0001

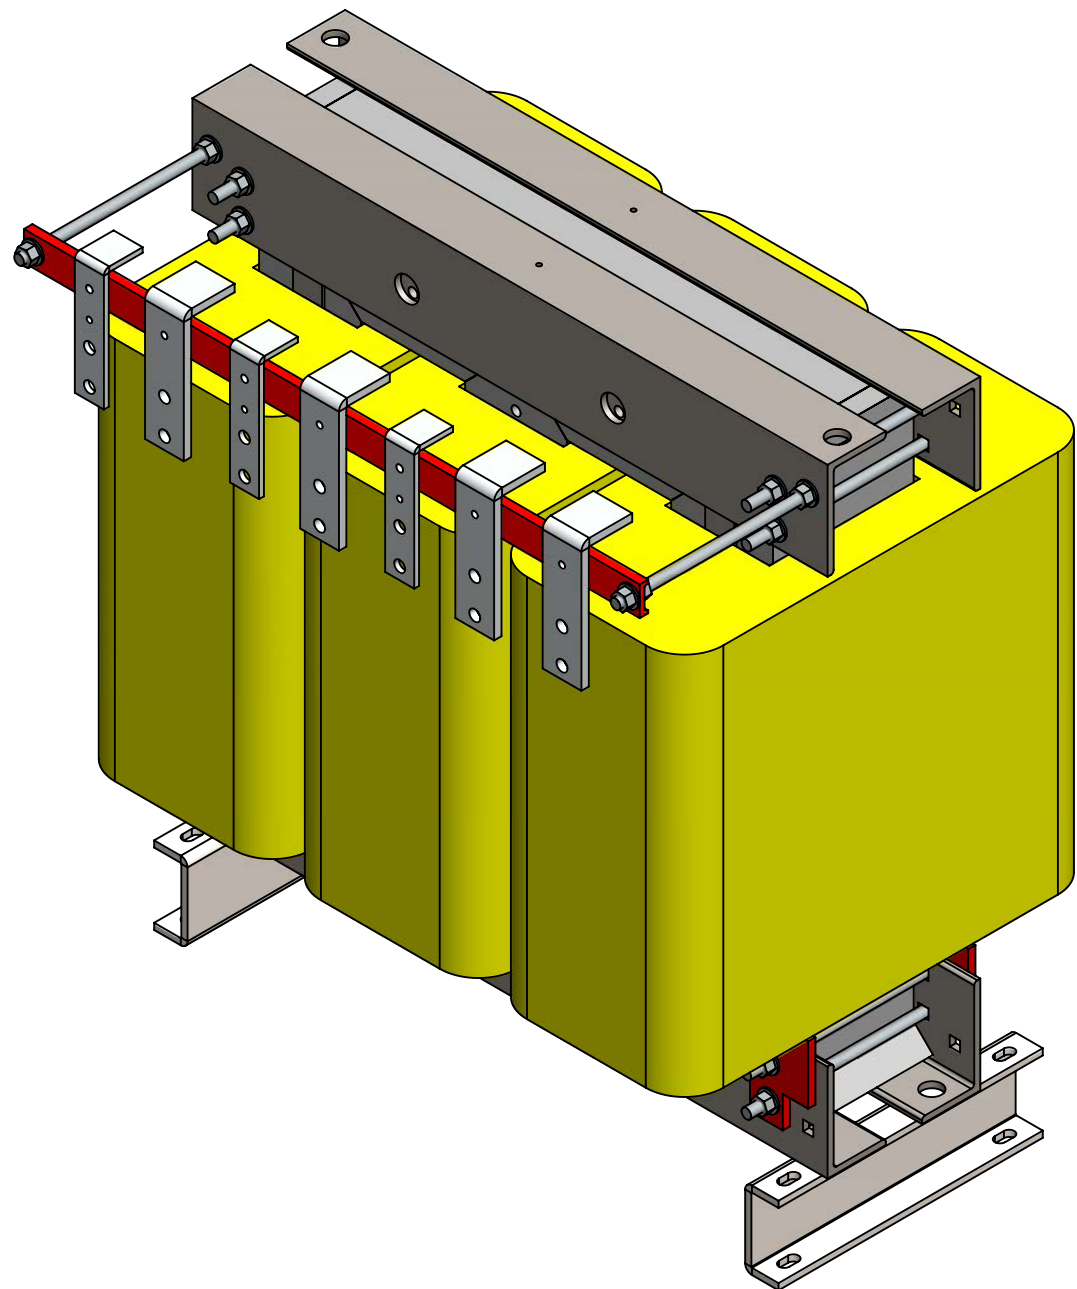

**OVERALL ASSEMBLY
300KVA TRANSFORMER
D/D W/CT
35" ENCL.**

FINISH:	
DRAWN DATE	
CHECKED DATE	

TOLERANCES UNLESS OTHERWISE SPECIFIED	
2-PL	± .02
3-PL	± .005
HOLES	± .030
ANGLES	± 1°
REMOVE ALL BURRS	
SCALE	NTS
DRAWN BY	MO
CHK'D BY	EJ

WEIGHT:

PART NO.
423-9317-000-CD

A	09/01/2020	INITIAL RELEASE
REV	DATE	DESCRIPTION